

COMMUNITY CARE BED SPECIFICATIONS

Basic Dimensions

Overall Length	2,160 mm
Overall Length (base extension extended)	2,360 mmm
Overall Width	990 mm
Overall Width (rails fitted)	1,010 mm
Mattress Surface Length (between panels)	1,990 mm
Bed Platform Height Range	225 mm to 650 mm
Back Rest Angle Adjustment	0° to 70° Retracting
Knee Bend Angle Adjustment	0° to 35°
Trendelenberg Tilt Adjustment (head and foot down)	0° to 14°

Bed Weight & Safe Working Load

Without Side Rails	95 Kg (approximately)
With Side Rails	115 Kg (approximately)
S.W.L Safety Factor = 2 x S.W.L	200Kg

T-Motion Electrical Parameters (to be confirmed)

Power Input	100-240V AC 50/60Hz, Max current 2.5A
Rate Load	interruption 10%, Max 2 minutes / 18 minutes
Leakage Protection	Class 1 Type B
Waterproof Grade	IP54

Standard

Designed in compliance with International Standard IEC 60601-2-52 where applicable.

Easily Assembled



Head & Foot Assemblies x 2 (interchangeable)




Head Assembly

Foot Section Assembly

Assembly requires 4 x button head cap screws to be fitted. All other assembly is by hand wheels that are pre-fitted to the assemblies.

Features

- Tente 100mm Total Lock Castors
- T-Motion Electronics
- Hi-Low 225 to 650 (different height ranges can be achieved by end panel design)
- Retracting backrest 0° to 70°
- Blow moulded deck panels (light weight, easily cleaned, infection control)
- Knee positioning 0° to 35°
- Foot elevation (incremental to horizontal when knee break raised)
- Easily Adjusted Base Extension (200mm)
- Soft contoured mattress retainers
- Range of timber panel designs

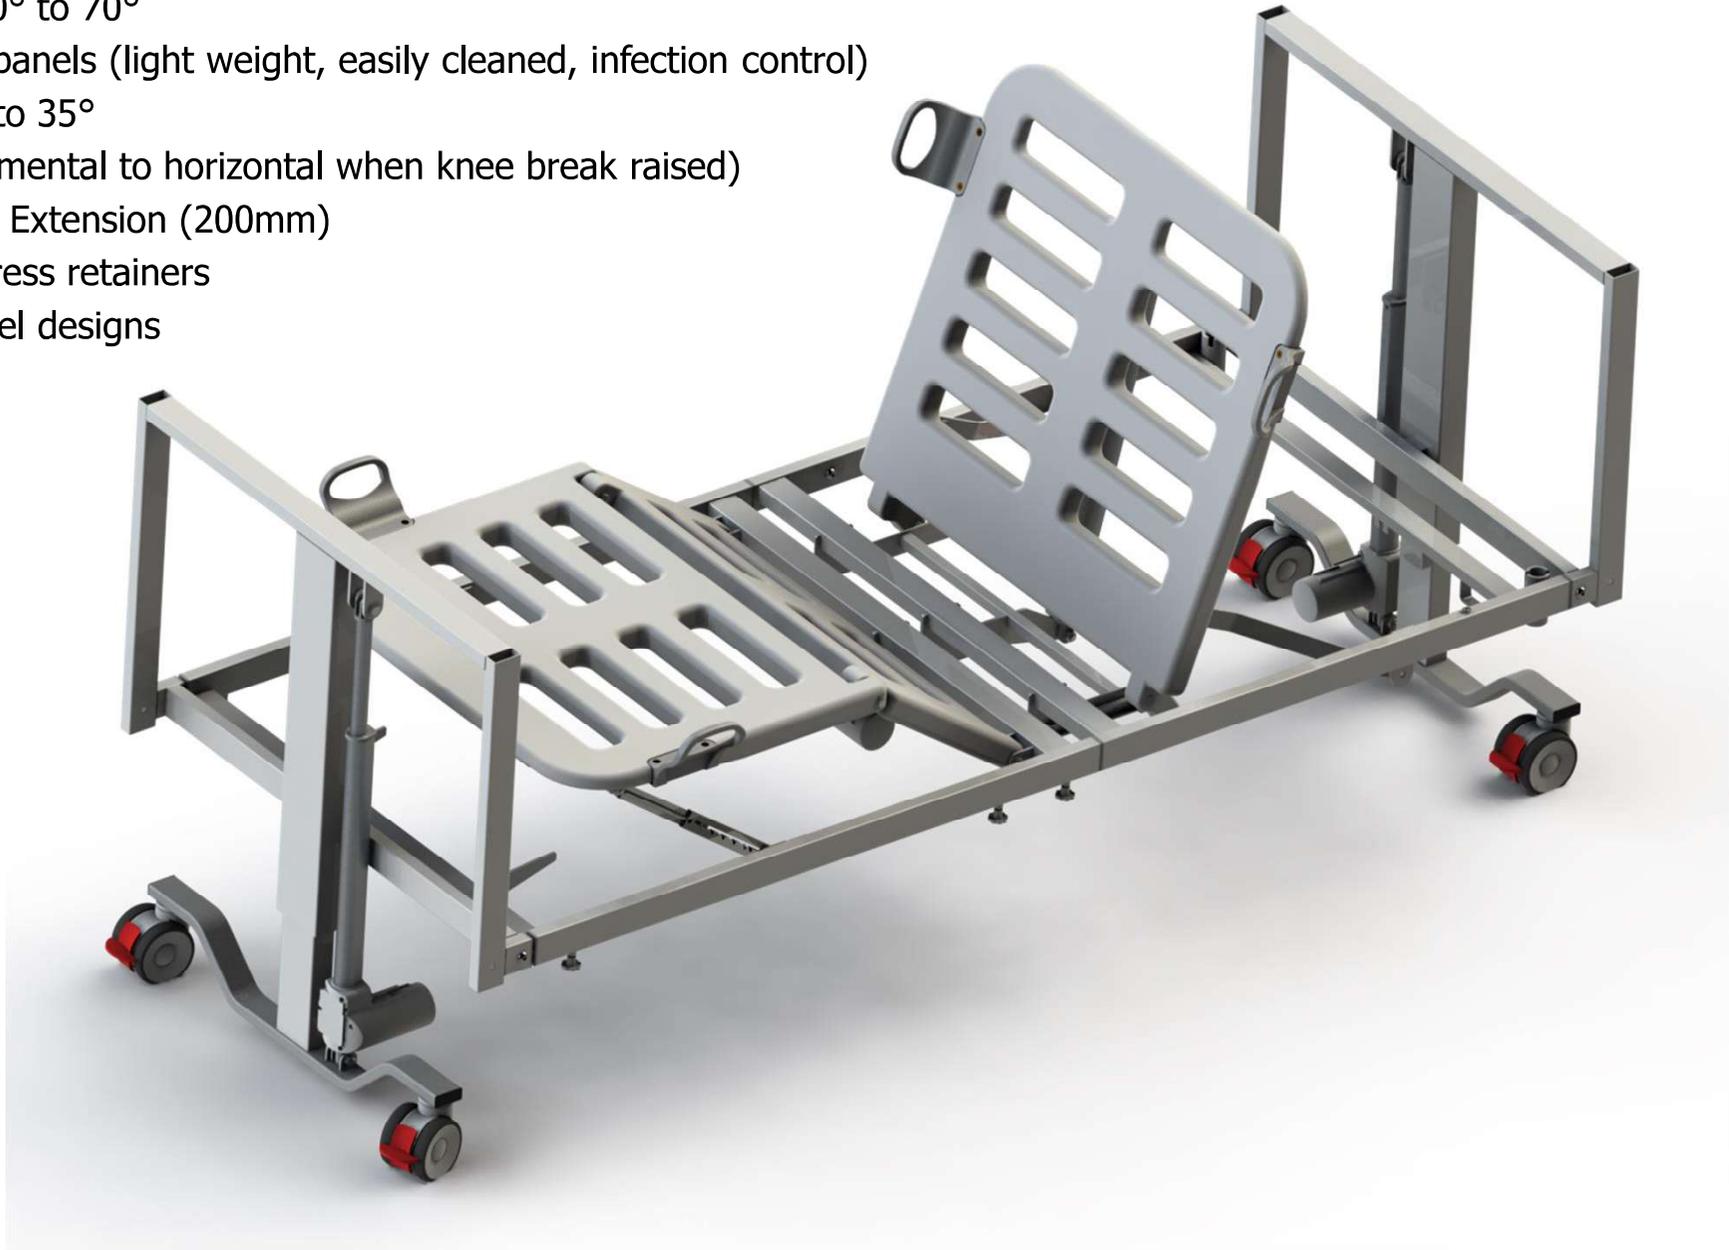

Timber Option with Aluminium Side Extrusions (shown with cherry timber finish) $\frac{3}{4}$ Side Rails Optional. All optional extras need to be purchased separately.

